


User Manual

AdvanceCall Box

Flush Mount



www.advancetec.com

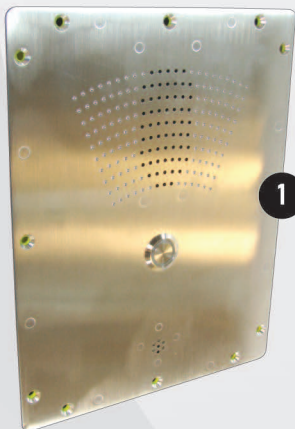

AdvanceCall Box Flush Mount consists of:

1. Part #ATT8560A

2. Part #AT055-0015

4. Part #AT8426A

Call Box (GSM)

Power adapter

Antenna



Index

Page	Details
3	Setting Up The Call Box
3	Optional Settings
5	Operating the AdvanceCall Box
6	Warranty



Note! The AdvanceCall™ Box Integrated System requires an activation onto the CDMA or GSM Network. To arrange for activation onto the CDMA or GSM Network contact your local CDMA or GSM Provider sales representative or retail store.



■ SETTING UP THE CALLBOX FLUSH MOUNT™

1. Remove AdvanceCall Box Flush Mount from the package.
2. Plug the power supply into the wall AC power outlet and the barrel plug at the end of the cord of the power supply into the corresponding power receptacle on the bottom back of the **AdvanceCall Box™**
3. Plug the **CDMA/GSM Antenna** into the **CDMA/GSM** corresponding antenna receptacle on the bottom back of the **AdvanceCall Box™**
4. For optional installations ***SEE OPTIONAL SETTINGS** below.
5. Place AdvanceCall Box to the desired spot where the Call Box will be installed and tighten into place with screws. (Screws not provided.)

[Diagram 2]

■ OPTIONAL SETTINGS CALLBOX FLUSH MOUNT™

- **GPS Antenna** – GPS Antenna can be installed in the receptacle labeled GPS, for GPS feature. (GPS antenna sold separately.)
- **RJ45** – RJ45 is to install other accessories such as a Handset.
(Accessories not provided)
- ****IO PORT UTILITY** – This port is to install other features such as open doors and more. (Can be only be programmed and activated by AdvanceTec.)
- **FLASHING LIGHT** – Connect flashing light accessory into this port. (Flashing light sold separately.)
- **BACK UP BATTERY** – Connect the Back Up Battery into this receptacle for emergency outages, and continues power for up 8hrs.
- ****USB UPGRADE PORT** – This port can only be used by AdvanceTec engineers to program the numbers provided by the customer or to update the Call Box when necessary.

DIAGRAM 1


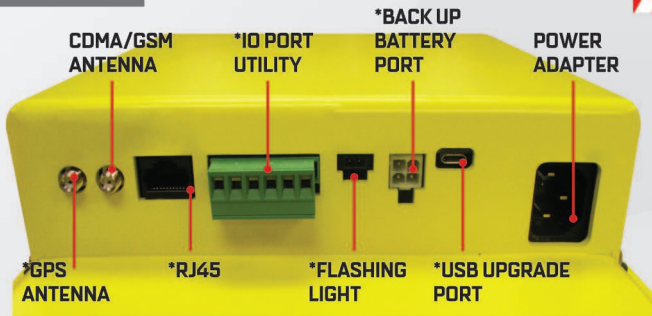


DIAGRAM 2

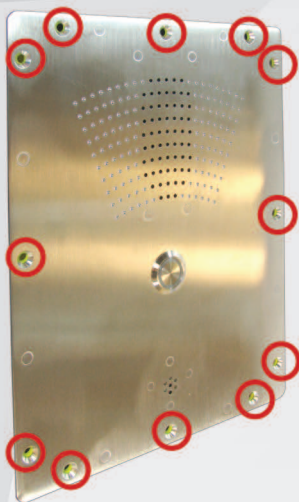


Insert screws into the designated holes in the call Box.

Recommended screw:

Security Screw
#10-24 x 5/8
Flat Head, Torx Drive



DIAGRAM 3

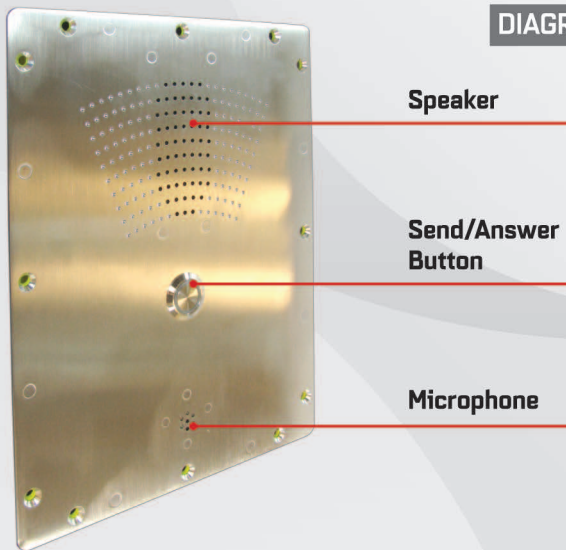

■ OPERATING THE ADVANCECALL™ BOX FLUSH MOUNT

1. To make a call to the number initially programmed by AdvanceTec into the AdvanceCall Box press the **SEND** button and speak towards the microphone.
2. The call will end once the person receiving the call hangs up or cancels the call.



■ WARRANTY

Your product has a one-year limited warranty from date of purchase against defects in material and workmanship. Under this warranty, you may return a faulty product to AdvanceTec and AdvanceTec will either repair or replace the faulty product free of charge. To return a faulty product for repair or replacement, please call AdvanceTec in the USA at 305-623-3939 to obtain a Return Material Authorization number. If outside of the USA, contact your authorized AdvanceTec dealer for a Return Material Authorization. This warranty covers only defects in material or workmanship in normal use and not damage from negligent handling, misuse, charging of batteries other than those the charger was specified and designed to charge, or lack of proper care.

Important: Opening of the product will void this warranty. This warranty gives you specific legal rights. You may also have other rights, which vary from state to state.

OTHER THAN AS EXPRESSLY SET FORTH ABOVE, AdvanceTec Industries, Inc DOES NOT MAKE ANY EXPRESS OR IMPLIED WARRANTIES OR REPRESENTATIONS REGARDING THEIR PRODUCTS. ANY IMPLIED WARRANTIES OF MERCHANTABILITY, NONINFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED AND DISCLAIMED.

AdvanceTec will not be liable or responsible for any loss, damage, or injury caused by any failure of its products to operate properly or promptly.



1150 NW 163rd Drive, Miami, FL 33169
T: 305-623-3939 F: 305-623-3996

www.advancetec.com

